

USAI® Lighting

the LittleOnes® Family Drivers and Enclosure Guide



Connect up to 4
fixtures per driver

Remote Driver
Enclosure

Place USAI's high performing
the LittleOnes® Zepto® downlight in
a 5' x 5' on center spacing to
achieve **30+ fc** on the floor with a
12' high ceiling with the LittleOnes®
Zepto® downlight at 3000K, 80+ CRI

the LittleOnes® Family Drivers & Enclosure Guide

the LittleOnes® Zepto® – Remote Driver Options

1 Standard Output with 2+ Fixtures Per Driver

Connect up to four light fixtures at a time to one dimming driver for efficient power distribution and cost savings.




Options available with the LittleOnes Zepto Classic White®:
07X4C - 7W, 11X4C - 11W, 15X4C - 15W.

NOTE: The quantity of fixtures connected to a driver depends on driver selection - please refer to spec sheets. Contact your local USAI representative for more information on additional driver layouts, power requirements and/or custom configurations.

2 High Output with 1 Fixture Per Driver

Dedicate one fixture per driver to provide optimal performance and the best possible delivered light output.

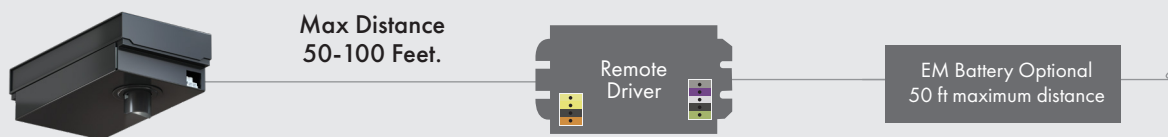

Options available with the LittleOnes Zepto Classic White®:
09X1M - 9W, 15X1M - 15W.

the LittleOnes® Zepto® – Integral Option

1 High Output with 1 Fixture Per Driver



Use one integral dimming driver per light fixture.
Above ceiling access required for service to the driver.
Available with trimmed fixtures only.

Available with the LittleOnes Zepto Classic White®:
09X1M - 9W, 15X1M - 15W.

NOTE: No EM Battery Option. Inverter (By Others) Possible.

the LittleOnes[®] Family Drivers & Enclosure Guide

the LittleOnes[®] Micro – Remote Driver Options

1 Standard Output with 2+ Fixtures Per Driver

Connect up to four light fixtures at a time to one dimming driver for efficient power distribution and cost savings.




Options available with the LittleOnes Micro Classic White[®]:
07X4C - 7W.

Options available with the LittleOnes Micro Dim-to-Warm + :
07DW2 - 7W.

NOTE: Use a maximum of two fixtures per driver.

2 High Output with 1 Fixture Per Driver

Dedicate one fixture per driver to provide optimal performance and the best possible delivered light output.

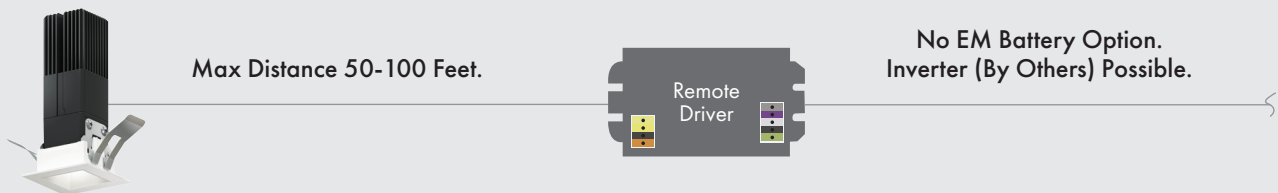

Options available with the LittleOnes Micro Classic White[®]:
09X1M - 9W.

Options available with the LittleOnes Micro Dim-to-Warm + :
07DW2 - 7W.

Similar to all USAI Lighting products, the LittleOnes family of products are compatible with all common lighting controls; choose from 0-10V, Phase, EcoSystem, DMX, or DALI dimming.

the LittleOnes® Family Drivers & Enclosure Guide

the LittleOnes® Micro Double – Remote Driver Options


1 Standard Output with 1 Fixtures Per Driver



Options available with the LittleOnes Micro Doubles Classic White®:
(2) 07X4C HEADS - 14W TOTAL

Options available with the LittleOnes Micro Doubles Dim-to-Warm + :
(2) 07DW2 HEADS - 14W TOTAL

2 High Output with 1 Fixture 2 Remote Drivers

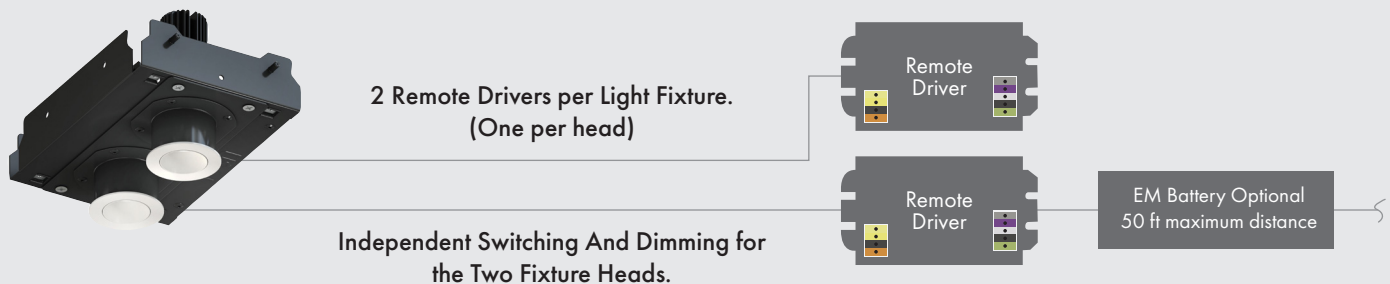

Options available with the LittleOnes Micro Doubles Classic White®:
(2) 09X1M HEADS - 18W TOTAL

Options available with the LittleOnes Micro Doubles Dim-to-Warm + :
(2) 07DW2 HEADS - 14W TOTAL

the LittleOnes® Micro Double – Integral Option



Use one integral dimming driver per light fixture.
Both fixture heads dim and switch together.
Above ceiling access required for service to the
driver. Available with trimmed fixtures only.

Options available with the LittleOnes Micro Doubles Classic White®:
(2) 07X4C HEADS - 14W TOTAL

Options available with the LittleOnes Micro Doubles Dim-to-Warm + :
(2) 07DW2 HEADS - 14W TOTAL


NOTE: No EM Battery Option. Inverter (By Others) Possible.

USAI Enclosures (Optional)


All remote drivers require enclosures by code. USAI makes your specification process easier by offering different driver enclosures to fulfill all of your project needs. See options below.

Single Driver

Enclosure options for one remote driver at a time only.



ENC Single Driver Enclosure

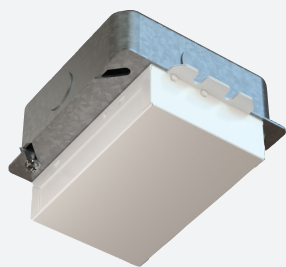


MP Junction Box Mounting Plate Enclosure

NOTE: USAI emergency battery must be enclosures by others.


6-Driver Prewired

Enclosure houses up to 6 dimming drivers.

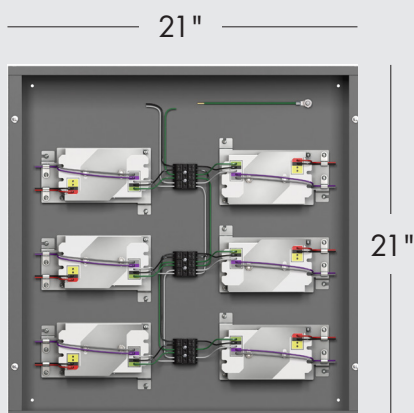

12-Driver Prewired

Enclosure houses up to 12 dimming drivers

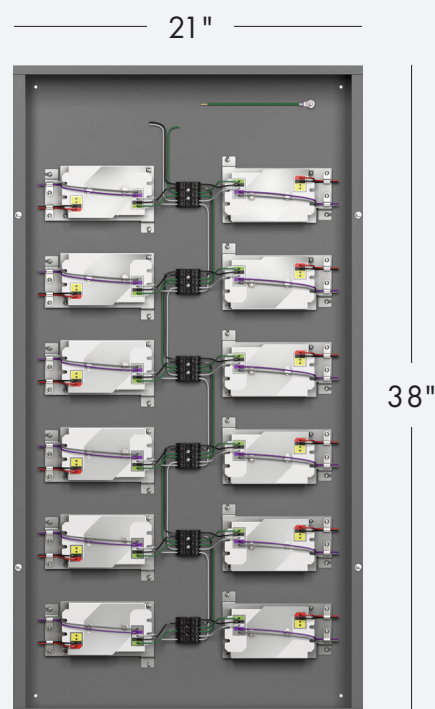

Did You Know?

USAI offers applications assistance for configuration of remote drivers and remote driver enclosures.

1 Contact your local USAI representative with your project's light fixture specification and zoning information.

2 USAI's application team will provide support to configure and specify enclosures for your project.

USAI[®]
Lighting

USAI LIGHTING COLLABORATORY
13 Crosby Street
New York, NY 10013
845-234-4090
showroom@usailighting.com

USAI LIGHTING HEADQUARTERS
1126 River Road
New Windsor, NY 12553
T: 845-565-8500
info@usailighting.com

©2023 USAI Lighting. All Rights Reserved.
USAI, the LittleOnes, Zepto, and Classic White
are registered trademarks of USAI, LLC.
All designs protected by copyright.
Covered by US Patents. Patents pending.
CA-158