







USAI[®]
Lighting


BeveLED[®] MINI

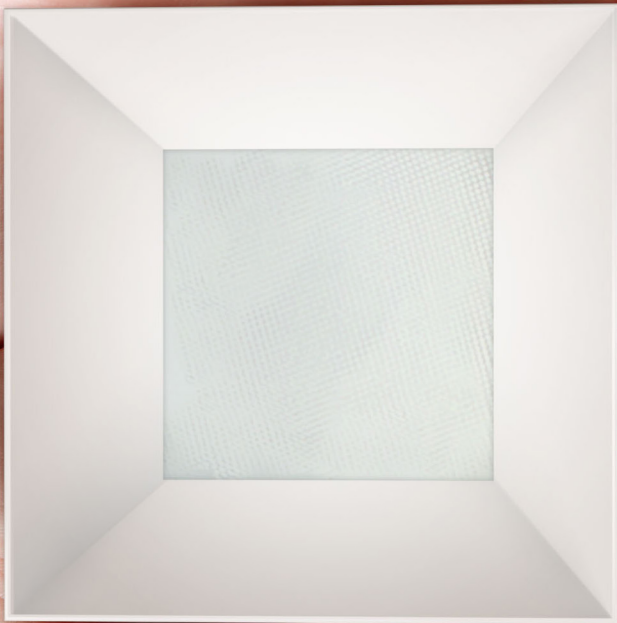

BeveLED Mini shown actual size

Precision Lighting

-  Warm Glow[®] Dimming
-  Color Select[®]
-  Color Harmony[®]
-  Point Perfect[®]
-  Shallow Fit[®]

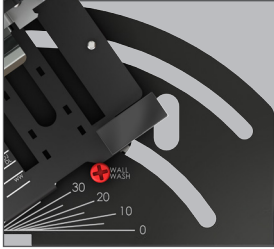


One Housing. Three Functions. Downlight, Adjustable and Wall Wash.




Adjustable Accessory Holder




Toolless Light Engine Replacement

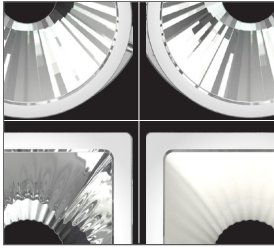


Interchangeable Reflector System: 10°- 50°

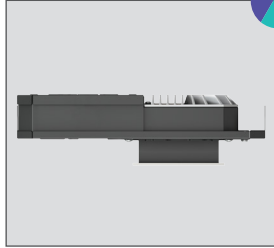


Shallow Fit Flat Housings Less Than 4" Tall

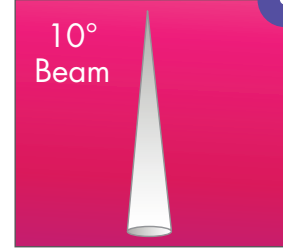

Point Perfect 10° Beam Option

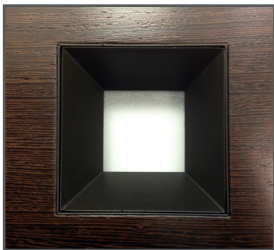

Trimless Millwork Option for Round and Square Trims

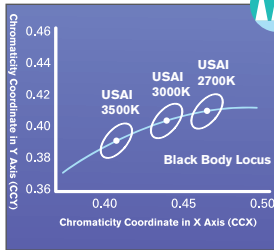

2-Step MacAdam Ellipse for Fixture-to-Fixture Color Consistency




5 Year Warranty

Color Technologies

Warm Glow® Dimming

Warm Glow Dimming provides warmth and glow once possible only in dimmed incandescent sources. Utilizing our patented proprietary algorithm and circuitry, Warm Glow Dimming technologies precisely mimic the black body curve of a standard 100W A19 lamp by gradually transitioning from 2700K, 3000K or 3500K down to 2200K. The result is virtually indistinguishable from an incandescent light source.

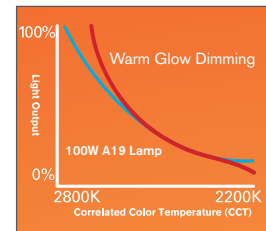

Color Select®

Color Select represents the next innovation in color temperature control for advanced LED recessed downlighting. Color Select® products allow users to adjust color temperature from 6000K down to 2200K while independently adjusting intensity to achieve ultimate control over the quality of light in a space with a single fixture type. Color Select interfaces with standard dimming and control systems.




Compatible with a variety of standard controls



Mini scale with super-sized performance

Small yet powerful, BeveLED Mini delivers more than 1100 lumens and 64 lm/W from a mere 3" optical aperture.


BeveLED Mini is capable of delivering a perfect 10-degree beam equal to any MR-16 or metal halide source, with medium (25°-35°) and wide (50°) beams for more uniform ambient light. Fixture-to-fixture color consistency is assured, and each product is rigorously tested for dimming compatibility with major architectural control systems. BeveLED Mini is ideal for installation in retail stores, museums, restaurants, hotels and high-end residential projects.

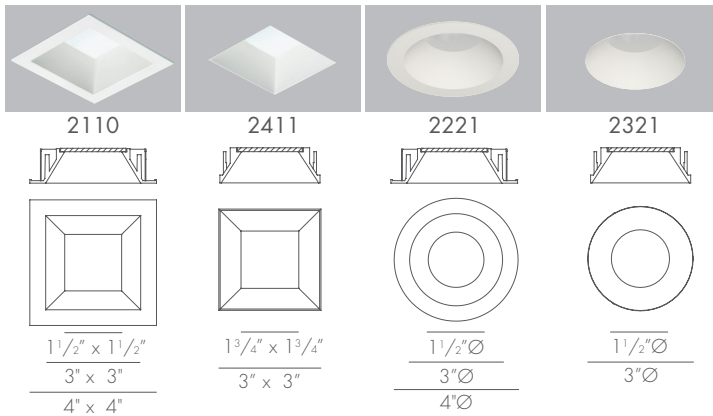


Downlight




DOWNLIGHT 	14 Watts		20 Watts	
		80+ CRI	90+ HIGH CRI	80+ CRI
Lumens per Watt	64	52	53	43
Source Lumens	1100	825	1500	1050
Delivered Lumens	900	725	1150	925
Color Consistency	 2-Step MacAdam Ellipse			
25°, 35°, 50° Beam Options				

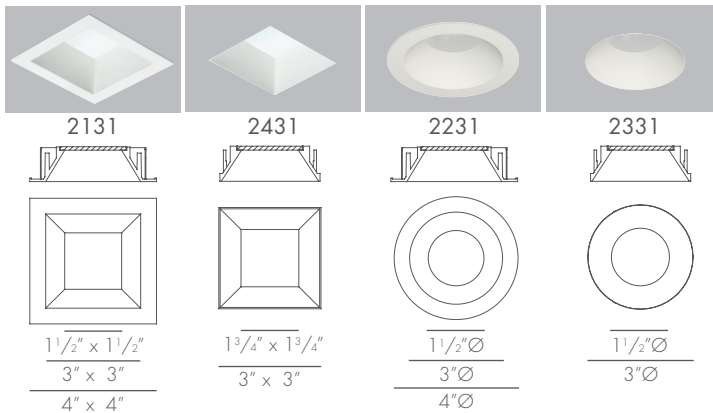

Adjustable



ADJUSTABLE 	14 Watts		20 Watts	
		80+ CRI	90+ HIGH CRI	80+ CRI
Lumens per Watt	45	36	37	30
Source Lumens	1100	825	1500	1050
Delivered Lumens	625	500	800	650
Center Beam Candle Power (10°) 	7825	6250	10050	8025
Color Consistency	 2-Step MacAdam Ellipse			
10° and 25° Beam Options				

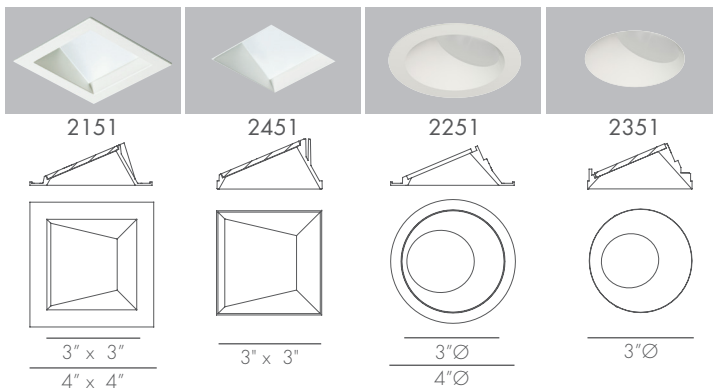Wall Wash



WALL WASH 	14 Watts		20 Watts	
		80+ CRI	90+ HIGH CRI	80+ CRI
Lumens per Watt	46	38	40	31
Source Lumens	1100	825	1500	1050
Delivered Lumens	650	525	850	675
Color Consistency	 2-Step MacAdam Ellipse			

*All data shown is for BeveLED Mini, 3000K. For Warm Glow Dimming and Color Select data check our website: usaighting.com.

BeveLED Awards and Recognition





Project: Sofie's at Saks Fifth Avenue

Photograph: © Peter Aaron / Esto

HOUSING OPTIONS

